


Active Fire-Rated Coat Hook Instructional Guide



Active Coat Hook
Side View

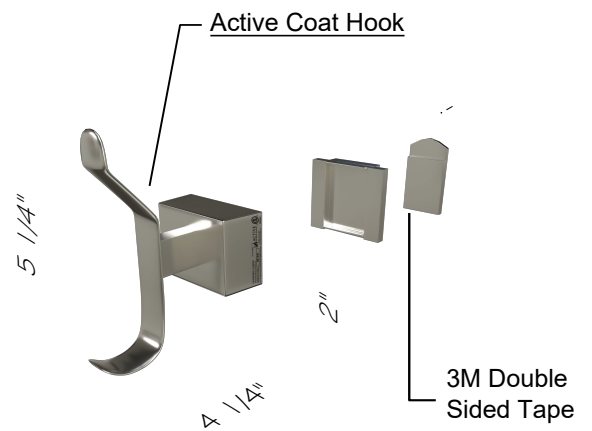

Installation Steps:

1. Clean surface area of debris before installing
2. Mount back plate on door using 3M Double Sided Tape provided

Technical Specs:	
Hook Item	Double Point Hook
Fastening	3M Double Sided Tape
Points per Hook	2
Number of Hooks	1
Hook Material	Stainless Steel
Weight Capacity	4lbs.
Hook Height	5 1/4 in.
Hook Base Width	2 in.
Projection	4 1/4" in.
Includes	Mounting Hardware



LISTING INFORMATION OF
Active Fire Door Excessive Gap Products
SPEC ID: 58841

Active Fire Door Products Inc.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Unless otherwise noted, assemblies in this section have been evaluated to the following standards:

UL 10C, Positive Pressure Fire Test of Door Assemblies

NFPA 252, Fire Test of Door Assemblies

CAN/ULC S104, Standard Method for Fire Test of Door Assemblies

Attribute	Value
Criteria	CAN / ULC S104 (2015)
Criteria	UL 10(c) (2016)
Criteria	NFPA 252 (2017)
CSI Code	08 70 00 Hardware
Fire Resistance	45 Min Positive Pressure
Fire Resistance	90 Min Positive Pressure
Fire Resistance	60 Min Positive Pressure
Fire Resistance	20 Min Positive Pressure
Intertek Services Certification	
Listed or Inspected	LISTED
Listing Section	DOOR & FRAME HARDWARE
Report Number	G104482767, G104482767, G104599653
Spec ID	58841
Verification Testing No	